



Harmony Analog

Converters for thermocouples,
Converters for Pt100 probes,
Voltage/current converters



Harmony

Discover [Harmony](#)

Advanced operator interface and industrial relays

Harmony operator interface and industrial relays enhance operational efficiency and equipment availability across industrial and building applications. Harmony includes intelligent connected products and edge terminals that visualize, gather and process data, enabling informed operator decisions

Explore our offer

- [Harmony Push Buttons and Switches](#)
- [Harmony HMI Operator Terminals, IPC and EdgeBox](#)
- [Harmony Signaling Devices](#)
- [Harmony Electrical Relays](#)
- [Harmony Safety](#)

Life Is On

Schneider
Electric


Quick access to product information

Get technical information about your product

References

Modicon TM3
I/O expansion modules for Modicon controllers
Analog I/O modules


Number and type of channels	Input range	Resolution	Input format (internal module)	Reference	Weight (kg)
2 voltage/current inputs	-15...+10 VDC 0...20 mA A, 20 mA	16,000 or 10,000 1/2	Source Sink	TM3AI2H TM3AI2HG	0.110 0.100
4 voltage/current inputs	-15...+10 VDC 0...20 mA A, 20 mA	12,000 or 10,000 1/2	Source Sink	TM3AI4 TM3AI4G	0.100 0.100
4 voltage/current or temperature inputs (I ² C, N, S, T, A, E, C) (PT100, RTD, Ni1000, RTD, PT1000)	-15...+10 VDC 0...20 mA A, 20 mA	16,000 or 10,000 1/2	Source Sink	TM3AI4T TM3AI4TG	0.110 0.100
4 differential temperature inputs (I ² C, N, S, T, A, E, C) (Non-isolated)	-15...+10 VDC 0...20 mA A, 20 mA	16,000 or 10,000 1/2	Source Sink	TM3AI4D TM3AI4DG	0.110 0.100
8 voltage/current	-15...+10 VDC	12,000 or 10,000 1/2	Source	TM3AI8	0.110

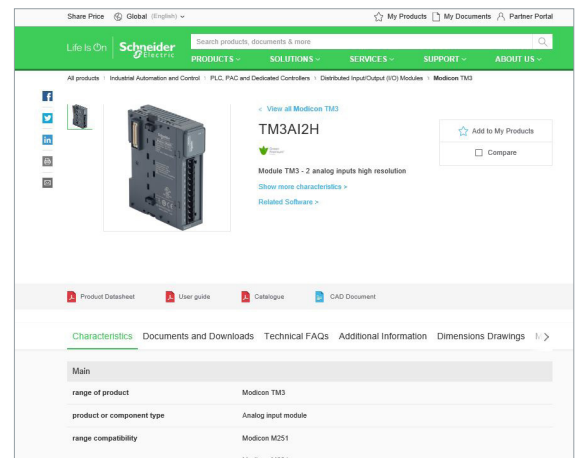


Each commercial reference presented in a catalog contains a hyperlink. Click on it to obtain the technical information of the product:

- Characteristics, Dimensions and drawings, Mounting and clearance, Connections and schemas, Performance curves
- Product image, Instruction sheet, User guide, Product certifications, End of life manual

Find your catalog

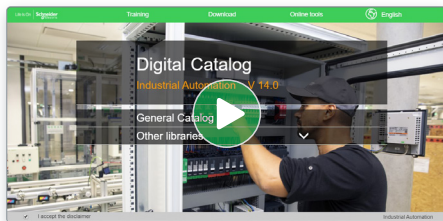

- > With just 3 clicks, you can access the Industrial Automation and Control catalogs, in both English and French
- > Consult digital automation catalogs at [Digi-Cat Online](#)

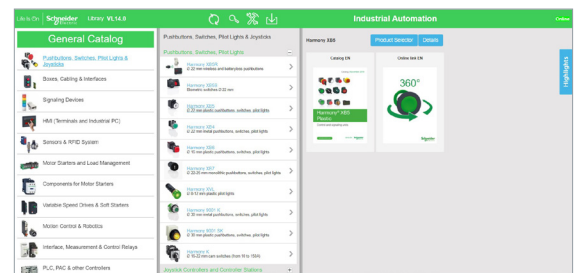


- Up-to-date catalogs
- Embedded product selectors, 360° pictures
- Optimized search by commercial references

Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)

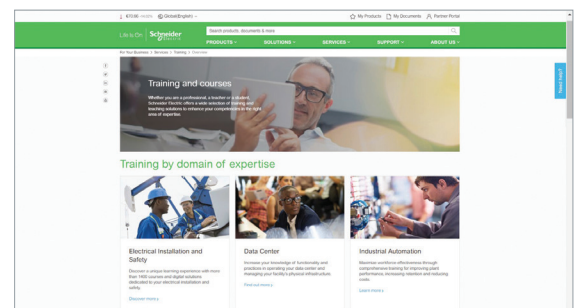

Content

Harmony Analog

Converters for thermocouples




Converters for Pt100 probes

Voltage/current converters

■ <i>Selection guide</i>	page 2
■ Presentation	
□ The Harmony Analog range	page 4
□ Converters for J and K type thermocouples: RMTJ/K	page 5
□ Universal converters for Pt100 probes: RMPT●0	page 4
□ Optimum converters for Pt100 probes: RMPT●3	page 4
□ Universal voltage/current converters: RMC	page 4
■ Description	page 5
■ References	
□ Converters for J and K type thermocouples: RMTJ/K	page 6
□ Universal converters for Pt100 probes: RMPT●0	page 6
□ Optimum converters for Pt100 probes: RMPT●3	page 6
□ Universal voltage/current converters: RMC	page 6
□ Accessories	page 7
■ Product reference index	page 8

Harmony Analog

Converters for thermocouples
Converters for Pt100 probes
Voltage/current converters

Product types		Converters for J and K type thermocouples				Universal and Optimum converters for Pt100 probes					Universal voltage/current converters										
																					
Input type		J (Fe-CuNi)		K (Ni-CrNi)		Pt100, 2, 3 and 4 fils					-										
Input signal	Temperature range	0...150 °C		0...300 °C		0...600 °C		0...1200 °C		-40...40 °C		-100...100 °C		0...100 °C		0...250 °C		0...500 °C		-	
		32...302 °F		32...572 °F		32...1112 °F		32...2192 °F		-40...104 °F		-148...212 °F		32...212 °F		32...482 °F		32...932 °F		-	
		Voltage		-		-		-		-		-		0...10 V		0...10 V; ± 10 V		0...50 V 0...300 V 0...500 V ~ or ~ 50/60 Hz		-	
		Current		-		-		-		-		-		4...20 mA		0...20 mA 4...20 mA		-		0...1.5 A 0...5 A 0...15 A ~ or ~ 50/60 Hz	
Output signal		Voltage/Current		Switchable: 0...10 V / 0...20 mA; 4...20 mA					Switchable: 0...10 V/0...20 mA, 4...20 mA for Universel range RMPT●0BD 0...10 V ou 4...20 mA for Optimum range RMPT●3BD					0...10 V or 4...20 mA		Switchable: 0...10 V ±10 V/0...20 mA 4...20 mA		Switchable: 0...10 V/4...20 mA 0...20 mA		0...10 V or 0...20 mA or 4...20 mA	
Supply voltage		Rated		~ 24 V ± 20%, not isolated					~ 24 V ± 20 %, not isolated					~ 24 V ± 20 %, isolated							
Built-in protection		Outputs		Reverse polarity, overvoltage and short-circuit Output safety feature, if input not wired or wire broken					Reverse polarity, overvoltage and short-circuit Output safety feature, if input not wired or wire broken												
		Supply		Reverse polarity					Reverse polarity												
Signalling		Green LED (power on)					Green LED (power on)														
Conformity/Approvals		Conforming to standards		IEC 60947-1, IEC 60584-1					IEC 60751, DIN 43 760					IEC 60947-1							
		Approvals		UL, CSA, GL, CE					UL, CSA, GL, CE					UL, CSA, GL, CE							
Type		RMTJ40BD	RMTJ60BD	RMTK80BD	RMTK90BD	RMPT10BD, RMPT13BD	RMPT20BD, RMPT23BD	RMPT30BD, RMPT33BD	RMPT50BD, RMPT53BD	RMPT70BD, RMPT73BD	RMCA22BD	RMCA55BD	RMCA60BD	RMCA61BD							
Pages		6					6 and 7														

Harmony Analog

Converters for thermocouples

Converters for Pt100 probes

Voltage/current converters



RMTJ/K



RMPT•0



RMPT•3



RMC

The Harmony Analog range of converters is designed to convert signals emitted by sensors or electrical measurements into standard electrical signals which are compatible with automation platforms, controllers (thermal processes, speed, ...).

They also allow the connection distance between a sensor and the measurement acquisition device to be increased: for example between a thermocouple and a programmable controller.

Conforming to IEC standards, UL and CSA certified, these converters are suitable for universal use.

Measurement signals for thermocouples and Pt100 probes

The voltages induced by thermocouples vary between 10 and 80 $\mu\text{V}/^\circ\text{C}$, Pt100 probes (100 ohms at 0 $^\circ\text{C}$) produce about 0.5 $\text{mV}/^\circ\text{C}$, with measurement currents of 1 mA. Depending on the sensor, the signal to be measured ranges from a few μV (thermocouple) to 250 and 700 mV for a Pt100 probe.

It is therefore difficult to transmit these low level signals over long electric lines without encountering problems of interference, signal reduction or errors.

Connecting Harmony Analog converters close to the sensors resolves these problems :

- 4-20 mA current loops transmitted over a long distance are less sensitive to interference than low level voltage signals from sensors,
- signal reductions during transmission (resistance) of voltages do not occur,
- the cables used to connect the converters to process equipment (programmable controllers) are standard cables, which are more cost effective than extension cables or compensation cables suitable for low level signals for Pt100 probes or thermocouples.

Presentation

The Harmony Analog range

The Harmony Analog range has been developed both to take account of the most common applications and to ensure great simplicity of installation:

- pre-set input and output scales, requiring no adjustment
- outputs protected against reverse polarity, overvoltage and short-circuits
- \sim 24 V power supply
- sealable protective cover
- rail mounting and screw fixing onto mounting plate
- LED indicator on the front panel
- input and output selector switches on the front panel
- output with fallback value if no input signal is present (due to failure of a sensor, for example).

The Harmony Analog converter range is divided into four families:

- Converters for J and K type thermocouples: **RMTJ/K**
- Universal converters for Pt100 probes: **RMPT•0**
- Optimum converters for Pt100 probes: **RMPT•3**
- Universal voltage/current converters: **RMC**.

Harmony Analog

Converters for thermocouples

Converters for Pt100 probes

Voltage/current converters




RMTJ40BD



RMPT70BD



RMCA61BD

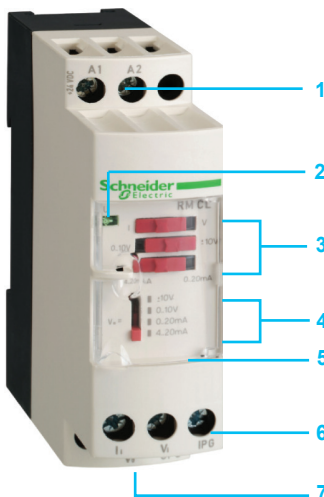

RMCL55BD

Presentation

Converters for J and K type thermocouples

Thermocouples, which consist of two metals with different thermo-electric characteristics, produce a voltage that varies according to temperature. This voltage is transmitted to the Harmony Analog converter which converts it to a standard signal.

Converters for thermocouples have cold junction compensation to allow detection of measurement errors induced by the connection to the device itself.

Converters for J and K type thermocouples have:

- for inputs, a pre-set temperature range, depending on the model:
 - Type J: 0...150 °C, 0...300 °C,
 - Type K: 0...600 °C, 0...1200 °C.
- for outputs, a switchable signal:
 - 0...10 V, 0... 20 mA, 4... 20 mA.

Universal converters for Pt100 probes

Pt100 probes with platinum resistor are electrical conductors whose resistance varies according to the temperature.

This ohmic resistance is transmitted to the Harmony Analog converter which converts it to a standard signal.

Universal converters for Pt100 probes have :

- for inputs, a pre-set temperature range, depending on the model:
 - -100...100 °C,
 - -40...40 °C,
 - 0...100 °C,
 - 0...250 °C,
 - 0...500 °C.
- for outputs, a switchable signal:
 - 0... 10 V, 0... 20 mA, 4... 20 mA.

The products in the family Universal converters for Pt100 probes allow wiring of Pt100 probes in 2, 3 and 4-wire mode.

Optimum converters for Pt100 probes

Derived from the above family, these converters have:

- for inputs, a pre-set temperature range identical to that of universal converters for Pt100 probes.
- for outputs: 0...10V signal dedicated to Zelio Logic relays (1) analogue inputs. They allow Pt100 probes to be wired in 2, 3 and 4-wire mode.

Universal voltage/current converters

This family of converters allows the adaptation of electrical values (voltage/current). Four products are available:

- a cost effective converter which will convert a 0...10 V signal to a 4...20mA signal or vice versa.
- a Universal voltage/current converter allowing the most common signals. They have:
 - for inputs, a voltage/current range:
 - 0...10 V, ± 10 V, 0...20 mA, 4...20 mA.
 - for outputs, a switchable voltage/current range:
 - 0...10 V, ± 10 V, 0...20 mA, 4...20 mA.
- two Universal voltage/current converters which allow conversion of electrical power signals, both a.c. and d.c. They have the following, depending on the model:
 - **for voltage inputs**, a range of 0 to 500 V (~ or ---)
 - for outputs, a switchable voltage/current range:
 - 0...10 V, 0...20 mA, 4...20 mA.
 - **for current inputs**, a range of 0 to 15 A (~ or ---)
 - for outputs, a voltage/current range:
 - 0...10 V, 0...20 mA, 4...20 mA.

Description

Harmony Analog converters have the following on their front panel, depending on the model:

- 1 Two terminals for --- 24 V supply connection
- 2 A 'Power ON' LED
- 3 Three input selector switches (depending on model)
- 4 An output selector switch (depending on model)
- 5 A sealable protective cover
- 6 A screw terminal block for inputs
- 7 A screw terminal block for outputs

(1) Converters dedicated to Zelio Logic smart relays. Consult catalog ref. [DIA3ED2111202EN](#)

Harmony Analog

Converters for thermocouples

Converters for Pt100 probes



RMTJ40BD



RMTK90BD



RMPT70BD



RMPT13BD

Converters for J and K type thermocouples

Supply voltage $\approx 24\text{ V} \pm 20\%$, non isolated

Type	Temperature range		Switchable output signal	Reference	Weight kg lb
	°C	°F			
Type J	0...150	32...302	0...10 V, 0...20 mA, 4...20 mA	RMTJ40BD	0.120 0.264
	0...300	32...572			
Type K	0...600	32...1112	0...10 V, 0...20 mA, 4...20 mA	RMTK80BD	0.120 0.264
	0...1200	32...2192			

Universal converters for Pt100 probes

Supply voltage $\approx 24\text{ V} \pm 20\%$, non isolated

Type	Temperature range		Switchable output signal	Reference	Weight kg lb
	°C	°F			
Pt100 2-wire, 3-wire and 4-wire	-40...40	-40...104	0...10 V, 0...20 mA, 4...20 mA	RMPT10BD	0.120 0.264
	-100...100	-148...212			
	0...100	32...212	0...10 V, 0...20 mA, 4...20 mA	RMPT30BD	0.120 0.264
	0...250	32...482	0...10 V, 0...20 mA, 4...20 mA	RMPT50BD	0.120 0.264
	0...500	32...932	0...10 V, 0...20 mA, 4...20 mA	RMPT70BD	0.120 0.264

Optimum converters for Pt100 probes (1)

Supply voltage $\approx 24\text{ V} \pm 20\%$, non isolated

Type	Temperature range		Output signal	Reference	Weight kg lb
	°C	°F			
Pt100 2-wire, 3-wire and 4-wire	-40...40	-40...104	0...10 V or 4...20 mA	RMPT13BD	0.120 0.264
	-100...100	-148...212			
	0...100	32...212	0...10 V or 4...20 mA	RMPT33BD	0.120 0.264
	0...250	32...482	0...10 V or 4...20 mA	RMPT53BD	0.120 0.264
	0...500	32...932	0...10 V or 4...20 mA	RMPT73BD	0.120 0.264

(1) Converters dedicated to Zelio Logic smart relays. Consult catalog ref. [DIA3ED2111202EN](#)



RMCN22BD



RMCL55BD



RMCA61BD

Universal voltage/current converters

Supply voltage $\approx 24\text{ V} \pm 20\%$, non isolated

Input signal	Output signal	Reference	Weight kg /lb
0...10 V or 4...20 mA	0...10 V or 4...20 mA	RMCN22BD	0.120 0.264

Supply voltage $\approx 24\text{ V} \pm 20\%$, isolated

Input signal	Output signal	Reference	Weight kg /lb
0...10 V, $\pm 10\text{ V}$, 0...20 mA, 4...20 mA	Switchable: 0...10 V, $\pm 10\text{ V}$, 0...20 mA, 4...20 mA	RMCL55BD	0.120 0.264
0...50 V, 0...300 V, 0...500 V \approx or $\sim 50/60\text{ Hz}$	Switchable: 0...10 V, 0...20 mA, 4...20 mA	RMCV60BD	0.150 0.330
0...1.5 A, 0...5 A, 0...15 A \approx or $\sim 50/60\text{ Hz}$	0...10 V or 0...20 mA or 4...20 mA	RMCA61BD	0.150 0.330

Connection accessories

Description	Type	Sold in lots of	Unit reference	Weight kg /lb
Screw terminal, Protective earth	Screw	50	NSYTRV42PE	0.025 0.055
Spring terminal, Protective earth	Spring	50	NSYTRR42PE	0.010 0.055

N	
NSYTRR42PE	7
NSYTRV42PE	7
R	
RMCA61BD	2 7
RMCL55BD	2 7
RMCN22BD	2 7
RMCV60BD	2 7
RMPT10BD	2 6
RMPT13BD	2 6
RMPT20BD	2 6
RMPT23BD	2 6
RMPT30BD	2 6
RMPT33BD	2 6
RMPT50BD	2 6
RMPT53BD	2 6
RMPT70BD	2 6
RMPT73BD	2 6
RMTJ40BD	2 6
RMTJ60BD	2 6
RMTK80BD	2 6
RMTK90BD	2 6

Life Is On



Learn more about our products at
www.se.com

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier - CS 30323
F-92500 Rueil-Malmaison Cedex
France

DIA5ED2210501EN
August 2021 - V1.0